



Non-insulated flexible duct

KFH

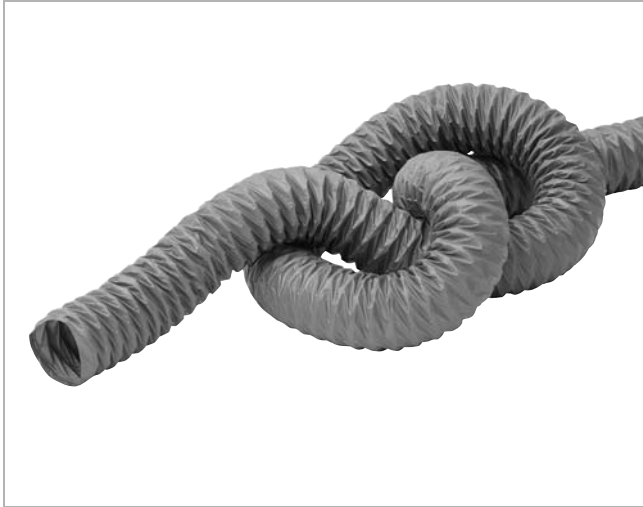

Dimensions

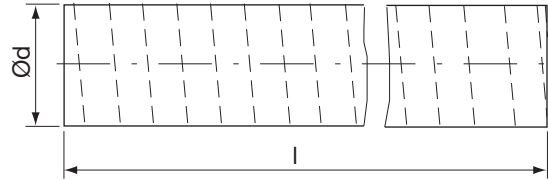

Description

PVC coated polyester mesh encapsulating a bronze coated wire helix.

Classifications

Reaction to fire class E according to EN 13501-1

Technical data

Duct materials Glass wool reinforcing coated with fire retardant PVC

Tolerance range Ød mm.....

Ø 63 – 160 $\begin{smallmatrix} +1 \\ -0 \end{smallmatrix}$

Ø 200 – 315 $\begin{smallmatrix} +4 \\ -0 \end{smallmatrix}$

Ø 400 $\begin{smallmatrix} +8 \\ -0 \end{smallmatrix}$

Temperature range -30 to +70 °C

Maximum air velocity 30 m/s

Packing Individual in net

Ød nom	Ød _i Inner mm	Ød _o Outer mm	l [mm]	Max. pressure Pa
63	67	70	6000	+3000
80	84	87	6000	+3000
100	106	109	6000	+3000
125	132	136	1200	+3000
125	132	136	6000	+3000
160	167	172	1200	+3000
160	167	172	6000	+3000
200	207	214	6000	+3000
250	257	264	6000	+3000
315	323	330	6000	+3000
400	409	418	6000	+3000

Ordering example

